

# VR 2.25/2.75 SPECIFICATIONS



## Model: CabLite® VR 2.25/2.75

**Material:** T6061 Aluminum

**Mounting:** T6061 Aluminum threaded mechanical fastening collar.

### LED

Viewing Angle	85-120 Degree	85-120 Degree	85-120 Degree
Kelvin Temperature	3000K	4000K	5000K
CRI	80+/-5	80+/-5	80+/-5
Lumens	252 lm +/-10	264lm +/-10	324 lm +/-10
Number LED	9	9	9
Wattage	5	5	5
Input Voltage	24VDC	24VDC	24VDC
LED Operating Temp Range		-40° to 85°C / 185°F	

*Specifications per independant testing laboratory - photometrics available upon request*

### Hardware & Wiring

Includes electrical box & easy connect wiring harness cables with secondary output wiring from supply source to each down light fixture.

### Finishes

(Standard) Black Anodized  
Clear Natural Aluminum

(Optional) White, Gold, Bronze


### Dimming Control (Optional)

**Car Top Light Covers** (Optional) for top of car through canopy installations with conduit knock outs


### Emergency Lighting - Battery Back Up (Optional)

Operates two lights and exceeds elevator code requirements through AMSE 17.3 -2010  
Battery Fault: Dry contact for visual (LED) or Audible alarm.

## VR 2.25 DIMENSIONS

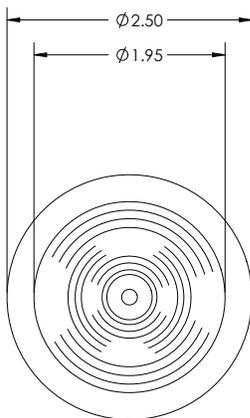

Front View

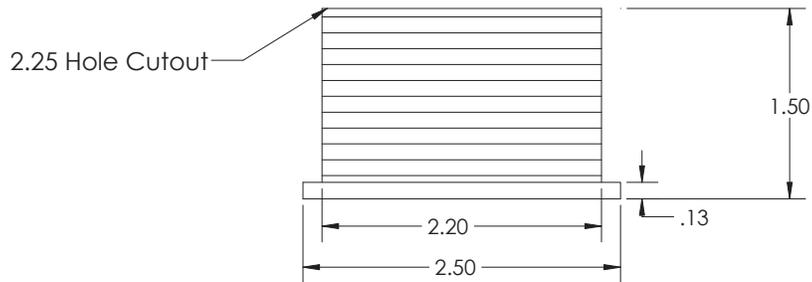


Side View




Mechanical Fastening Collar

## VR 2.75 DIMENSIONS

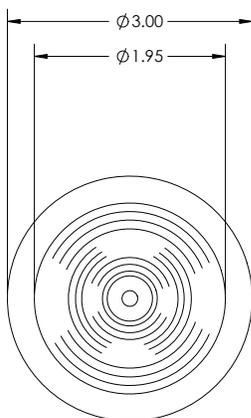

Front View

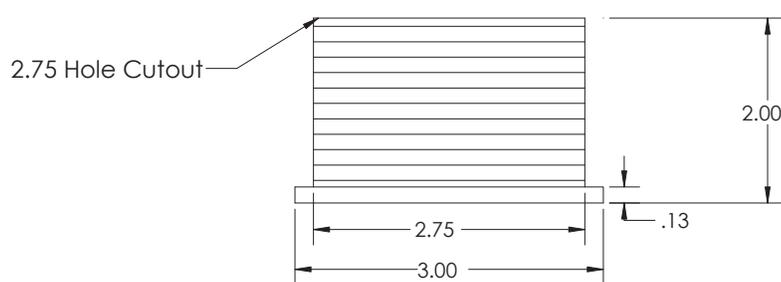

Side View



Mechanical Fastening Collar